



PRECAST CONCRETE WALL PANEL CONNECTION DEVICE

PC-10



FULL SCALE STRUCTURAL TESTING PROGRAM

Completed under the direction of:

Bahram M. Sharooz, PE, FACI, FASCE, FSEI

Director - University of Cincinnati Large Scale Test Facility

and

Robert Foley, PE

January 2021

ABSTRACT


The PC-10 precast panel to foundation connection device was engineered to meet the nominal tensile load requirements of American Concrete Institute's (ACI) code requirements ([ACI 318 \('08\) 16.5.1.3 sub-paragraph B](#)).

The purpose of the testing is to confirm the PC-10's ability to meet these nominal design capacities. In addition, a further series of tests were conducted to determine in-plane, out-of-plane and combined shear capacities.

Note: In each of the tests the PC-10 was connected to the foundation with a Simpson Strong-Tie, Titen $\frac{3}{4} \times 8\frac{1}{2}$ HD concrete anchor. Also, of note is that all tests were conducted without grout in the 1" space between bottom of panel and top of foundation. The common practice of filling this space with non-shrink grout would significantly increase the shear capacity of the PC-10 connection.

Location of PC-10 Devices in the Test Specimen

Four different structural load tests were conducted on the 8'-0" wide, 10'-0" tall and 7.25" thick precast concrete panel containing (4) PC-10 devices. The devices were located across the two 8-foot edges (top and bottom) of the panel. On one end the devices were located 1' from each edge. This end was used for tension testing. On the opposite end the devices were located 2'-0" (recommended) from each edge. This end was used both for tension testing and subsequently for in-plane, out-of-plane and combined shear testing. Test loads were applied using a hydraulic ram and a variety of loading apparatus - [See Full Scale Testing of PC-10 Series Report](#).

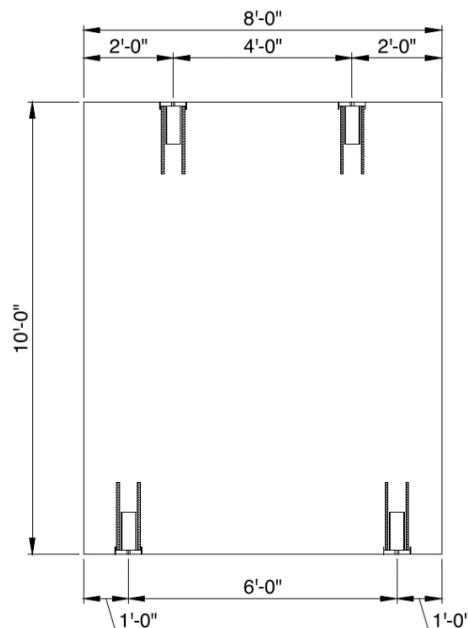

PC-10 TEST RESULTS

TENSION ONLY TEST RESULTS (Devices located 1'-0" in from panel edge)

Nominal Design Capacity: 10 Kips

Achieved Load Capacity: **17.2 Kip**

TENSION ONLY TEST RESULTS (Devices located 2'-0" in from panel edge)

Nominal Design Capacity: 10 Kips

Achieved Load Capacity: **17.9 Kips**

SHEAR TEST RESULTS (Devices located 2'-0" in from panel edge)

In-Plane Shear:

Applied Load **10.1 Kips**

Out-of-Plane Shear:

Applied Load **10.1 Kips**

Combined In-Plane /Out-of-Plane Shear:

Applied Load **14.3 Kips**

Note: The loading of the PC-10 devices for in-plane, out-of-plane and combined shear testing was limited to the published material shear capacity of the Simpson Strong-Tie Titan $\frac{3}{4}$ x $8\frac{1}{2}$ HD concrete anchor (see formal test report). Also, of note is that all tests were conducted without grout in the 1" space between bottom of panel and top of foundation.

Conclusion:

The PC-10 exceeded the 10,000 lbs. tension nominal design capacity with a **ductile capacity of 17,200 lbs; a 1.72 factor of safety.**

The in-plane, out-of-plane and combined shear tests demonstrated that the PC-10, in combination with the Simpson Titan $\frac{3}{4}$ x $8\frac{1}{2}$ HD concrete anchor, provide a **minimum of 10,000 lbs shear resistance.** Note further that all tests were conducted without grout in the 1" space between bottom of panel and top of foundation. The common practice of filling this space with non-shrink grout would significantly increase the shear capacity of the PC-10 connection.

END

Any engineering questions regarding the PC-10 device, testing methods, results or requests for general information may be directed to:

Bob Foley. PE Bob@theadvanconn.com Cell: (937) 689-7725